


FERRITE BEAD

RH TYPE

APPLICATION

Shielding signal, noise suppression, transient frequency damping for EGA cards, VGA cards, PC boards, TV games and more.

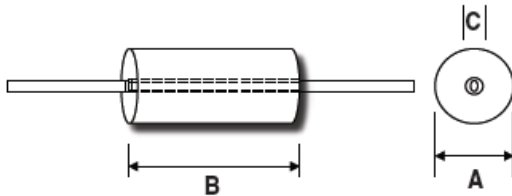

FEATURES

- Through hole leaded ferrite bead.
- Most economical component for through-hole applications requiring discrete signal filtering.
- Over 50 Ohms impedance at 100 MHz.
- Higher current carrying capability than surface mount devices.
- Can be taped and reeled for auto insertion.

MATERIAL


K5B A6 A5

DIMENSIONS

Unit : mm

CORES	A	B	C
RH3.5X4.7X0.8	3.5±0.15	4.7±0.30	0.8±0.15
RH3.5X6.0X0.8	3.5±0.15	6.0±0.30	0.8±0.15
RH3.5X7.5X0.8	3.5±0.15	7.5±0.30	0.8±0.15
RH3.5X8.0X0.8	3.5±0.15	8.0±0.30	0.8±0.15
RH3.5X9.0X0.8	3.5±0.15	9.0±0.30	0.8±0.15
RH3.5X3.0X1.2	3.5±0.15	3.0±0.20	1.2±0.15
RH3.5X4.0X1.2	3.5±0.15	4.0±0.30	1.2±0.15
RH3.5X6.0X1.2	3.5±0.15	6.0±0.30	1.2±0.15
RH3.5X5.0X1.8	3.5±0.15	5.0±0.30	1.8±0.15
RH4.0X2.0X2.0	4.0±0.20	2.0±0.20	2.0±0.15
RH4.0X10X2.0	4.0±0.20	10.0±0.30	2.0±0.15

ORDERING COED

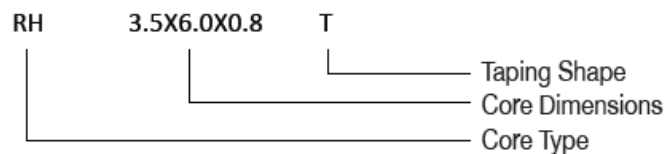

CHARACTERISTICS

